


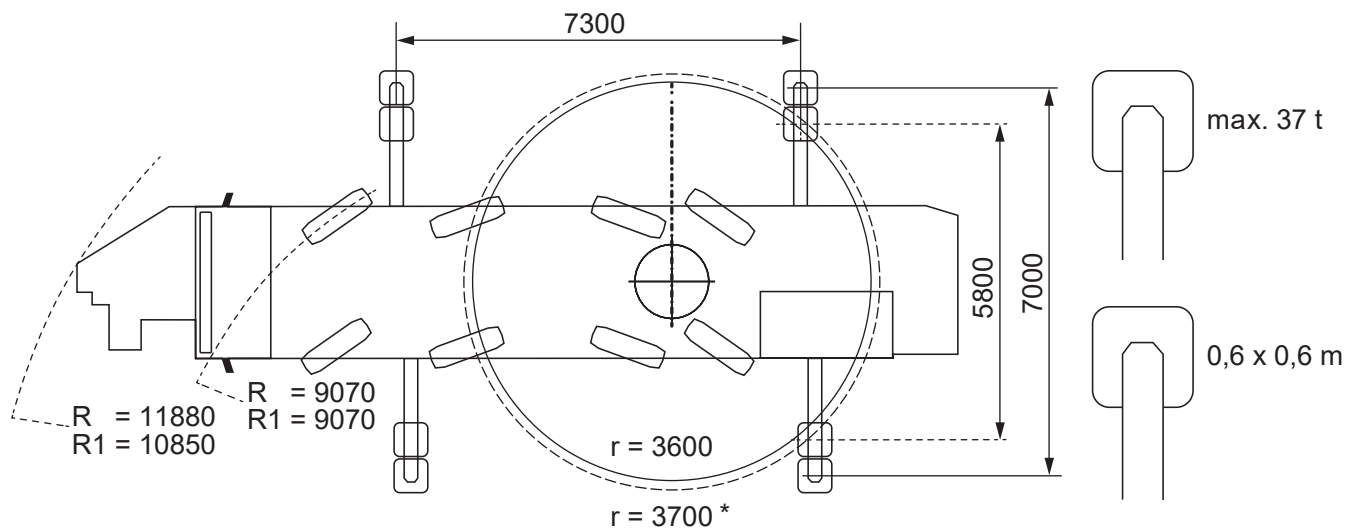
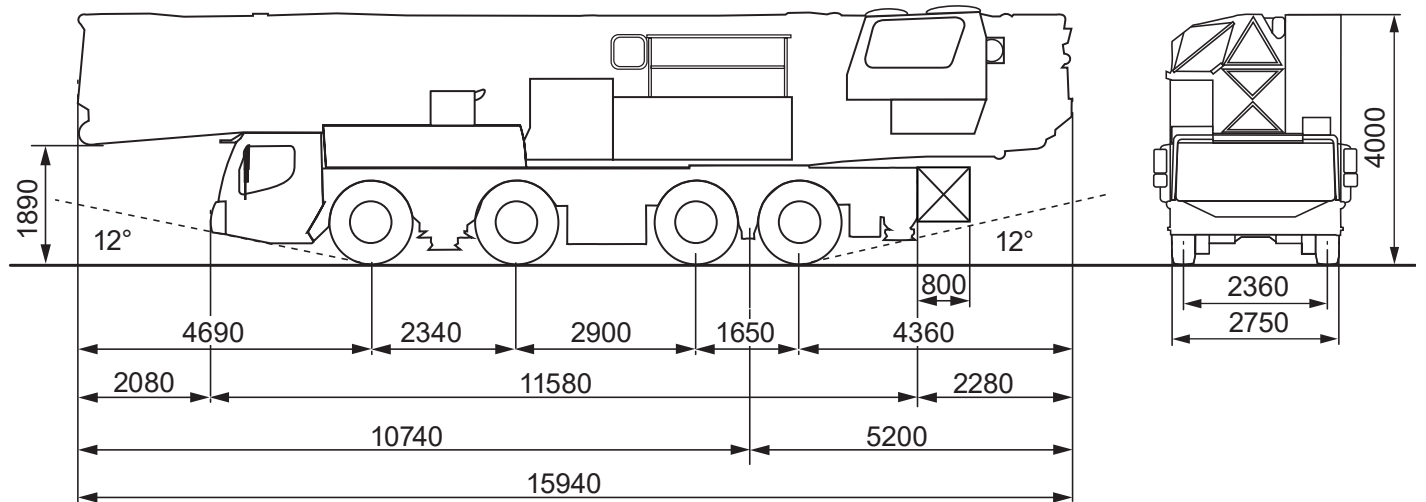


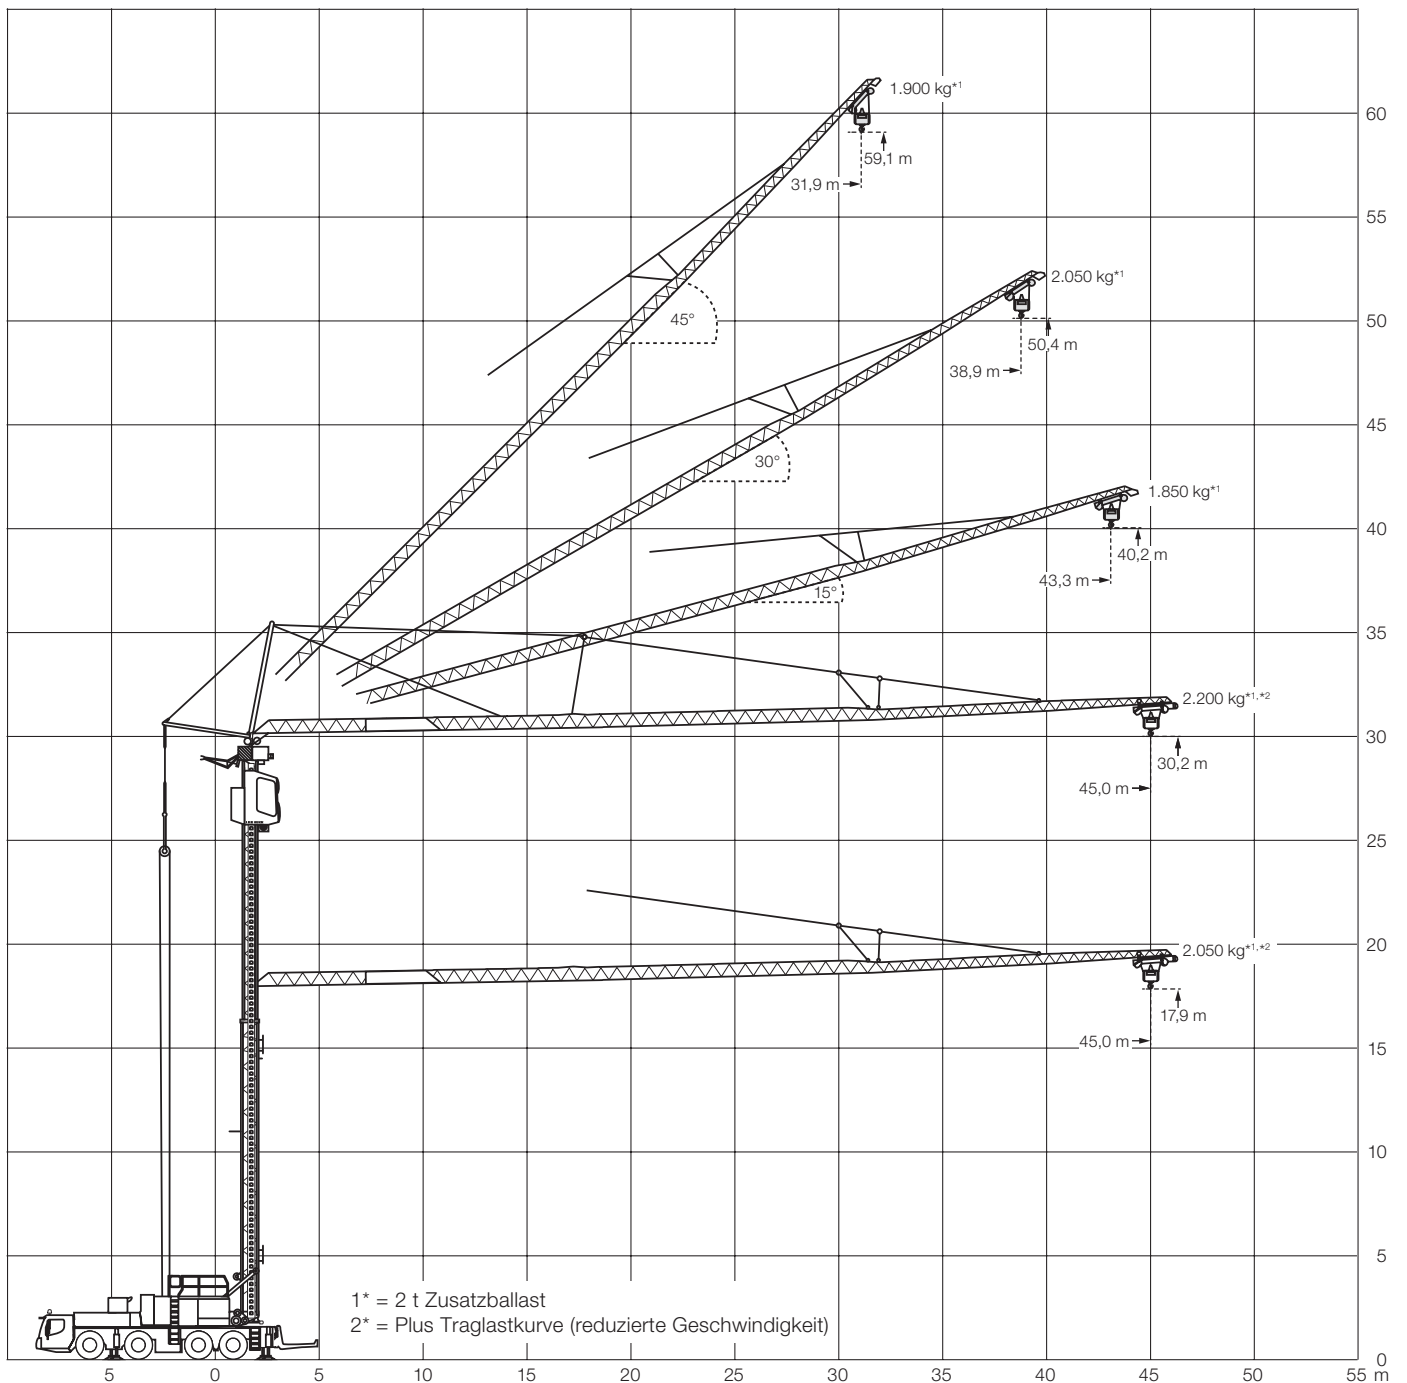

* Mit 2,0 t Zusatzballast

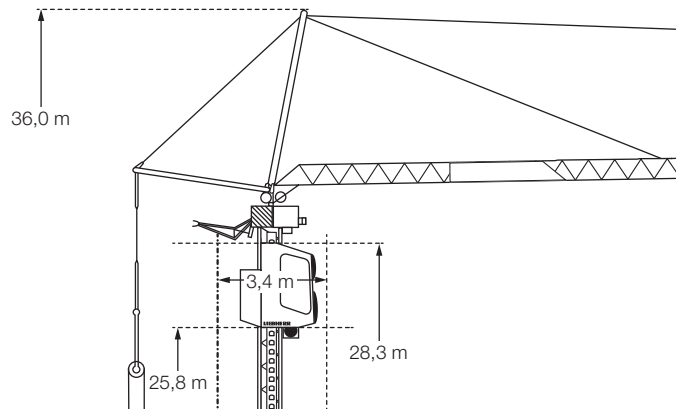

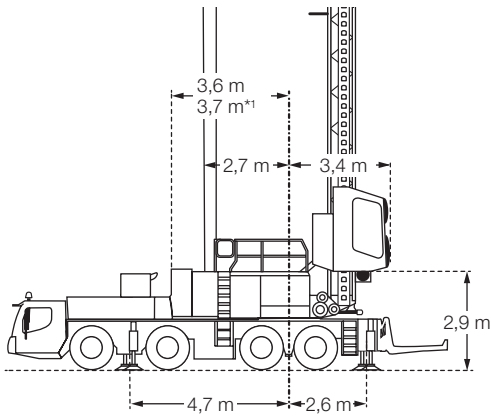

	0°	0° PLUS*	15°	15° PLUS	30°	45°	45° PLUS	
3,3	8	8	1,85	2,6	6	1,85	2,8	3,3
10	8	8	1,85	2,6	6	1,85	2,8	10
12	8	8	1,85	2,6	6	1,85	2,8	12
14	6,91	7,51	1,85	2,6	5,05	1,85	2,8	14
16	6,08	6,67	1,85	2,6	4,56	1,85	2,8	16
18	5,41	5,99	1,85	2,6	4,15	1,85	2,8	18
20	4,87	5,42	1,85	2,6	3,81	1,85	2,8	20
22	4,42	4,93	1,85	2,6	3,51	1,85	2,8	22
24	4,05	4,52	1,85	2,6	3,25	1,85	2,67	24
26	3,73	4,16	1,85	2,6	3,03	1,85	2,43	26
28	3,45	3,84	1,85	2,6	2,83	1,85	2,23	28
30	3,2	3,56	1,85	2,6	2,65	1,85	2,05	30
32	2,99	3,32	1,85	2,6	2,49	1,85	1,9	32
34	2,8	3,1	1,85	2,43	2,35			34
36	2,63	2,9	1,85	2,29	2,22			36
38	2,48	2,72	1,85	2,15	2,05			38
40	2,34	2,55	1,85	2,03				40
42	2,22	2,4	1,85	1,92				42
44	2,1	2,26	1,85	1,85				44
45	2,05	2,2						45

Wind max. 14m/s / 6,5 Bft

* Plus-Traglastkurven mit steuerungstechnischen Einschränkungen (reduzierte Geschwindigkeit)



45m



7,3x7m



9,3t



12t



360°




14439

Total 48t

	0°	0° PLUS*	15°	15° PLUS	30°	45°	45° PLUS	
3,3	8	8	1,85	2,6	6	1,85	2,8	3,3
10	8	8	1,85	2,6	6	1,85	2,8	10
12	7,37	8	1,85	2,6	5,26	1,85	2,8	12
14	6,36	7,15	1,85	2,6	4,69	1,85	2,8	14
16	5,58	6,24	1,85	2,6	4,22	1,85	2,8	16
18	4,97	5,53	1,85	2,6	3,83	1,85	2,8	18
20	4,46	4,96	1,85	2,6	3,5	1,85	2,8	20
22	4,05	4,48	1,85	2,6	3,22	1,85	2,8	22
24	3,7	4,09	1,85	2,6	2,98	1,85	2,67	24
26	3,4	3,75	1,85	2,6	2,77	1,85	2,43	26
28	3,14	3,45	1,85	2,6	2,58	1,85	2,23	28
30	2,92	3,2	1,85	2,6	2,41	1,85	2,05	30
32	2,72	2,98	1,85	2,46	2,26	1,85	1,9	32
34	2,54	2,78	1,85	2,33	2,13			34
36	2,39	2,6	1,85	2,21	2,01			36
38	2,25	2,45	1,85	2,1	1,85			38
40	2,12	2,3	1,85	2				40
42	2	2,17	1,85	1,91				42
44	1,9	2,06	1,85	1,85				44
45	1,85	2						45

Wind max. 14m/s / 6,5 Bft

* Plus-Traglastkurven mit steuerungstechnischen Einschränkungen (reduzierte Geschwindigkeit)



Total 44t

	0°	0° PLUS*	15°	15° PLUS	30°	45°	45° PLUS	
3,3	7,54	8	1,85	2,6	6	1,85	2,8	3,3
9,5	7,54	8	1,85	2,6	6	1,85	2,8	9,5
10	7,54	8	1,85	2,6	6	1,85	2,8	10
12	6,1	6,79	1,85	2,6	5,03	1,85	2,8	12
14	5,1	5,64	1,85	2,6	4,32	1,85	2,8	14
16	4,37	4,8	1,85	2,6	3,77	1,85	2,8	16
18	3,82	4,17	1,85	2,6	3,34	1,85	2,8	18
20	3,38	3,68	1,85	2,6	2,99	1,85	2,8	20
22	3,02	3,28	1,85	2,6	2,7	1,85	2,8	22
24	2,73	2,96	1,85	2,59	2,45	1,85	2,6	24
26	2,48	2,69	1,85	2,36	2,25	1,85	2,37	26
28	2,27	2,45	1,85	2,16	2,07	1,85	2,17	28
30	2,09	2,26	1,85	1,99	1,91	1,85	2	30
32	1,93	2,08	1,84	1,84	1,77	1,85	1,85	32
34	1,79	1,93	1,7	1,7	1,65			34
36	1,67	1,8	1,59	1,59	1,54			36
38	1,56	1,68	1,48	1,48	1,45			38
40	1,46	1,57	1,39	1,39	1,4			40
42	1,37	1,48	1,31	1,31				42
44	1,29	1,39	1,25	1,25				44
45	1,25	1,35						45

Wind max. 14m/s / 6,5 Bft

* Plus-Traglastkurven mit steuerungstechnischen Einschränkungen (reduzierte Geschwindigkeit)




45m



7,3x7m



0t



10t



360°




14439

Total 40t

	0°	0° PLUS*	15°	15° PLUS	30°	45°	45° PLUS	
3,3	8	8	1,85	2,6	6	1,85	2,8	3,3
6,5	8	8	1,85	2,6	6	1,85	2,8	6,5
10	4,68	5,47	1,85	2,6	4,34	1,85	2,8	10
12	3,75	4,33	1,85	2,6	3,52	1,85	2,8	12
14	3,11	3,57	1,85	2,6	2,95	1,85	2,8	14
16	2,64	3,02	1,85	2,52	2,52	1,85	2,69	16
18	2,28	2,6	1,85	2,18	2,19	1,85	2,33	18
20	2	2,28	1,85	1,91	1,93	1,85	2,04	20
22	1,77	2,02	1,69	1,69	1,72	1,81	1,81	22
24	1,58	1,8	1,51	1,51	1,54	1,62	1,62	24
26	1,43	1,62	1,36	1,36	1,39	1,46	1,46	26
28	1,29	1,47	1,23	1,23	1,27	1,32	1,32	28
30	1,18	1,34	1,12	1,12	1,16	1,2	1,2	30
32	1,08	1,23	1,03	1,03	1,06	1,1	1,1	32
34	0,99	1,13	0,94	0,94	0,97			34
36	0,91	1,04	0,87	0,87	0,9			36
38	0,84	0,97	0,8	0,8	0,83			38
40	0,78	0,9	0,74	0,74	0,8			40
42	0,73	0,83	0,69	0,69				42
44	0,67	0,78	0,65	0,65				44
45	0,65	0,75						45

Wind max. 14m/s / 6,5 Bft


* Plus-Traglastkurven mit steuerungstechnischen Einschränkungen (reduzierte Geschwindigkeit)



	0°	0° PLUS*	15°	15° PLUS	30°	45°	45° PLUS	
3,3	8	8	1,85	2,6	6	1,85	2,8	3,3
10	8	8	1,85	2,6	6	1,85	2,8	10
12	6,93	7,62	1,85	2,6	5,58	1,85	2,8	12
14	5,87	6,41	1,85	2,6	4,88	1,85	2,8	14
16	5,08	5,51	1,85	2,6	4,32	1,85	2,8	16
18	4,47	4,83	1,85	2,6	3,88	1,85	2,8	18
20	3,98	4,28	1,85	2,6	3,51	1,85	2,8	20
22	3,58	3,84	1,85	2,6	3,2	1,85	2,8	22
24	3,25	3,48	1,85	2,6	2,93	1,85	2,67	24
26	2,97	3,17	1,85	2,6	2,7	1,85	2,43	26
28	2,73	2,91	1,85	2,41	2,5	1,85	2,23	28
30	2,52	2,69	1,85	2,25	2,33	1,85	2,05	30
32	2,34	2,49	1,85	2,1	2,18	1,85	1,9	32
34	2,18	2,32	1,85	1,97	2,04			34
36	2,03	2,17	1,85	1,85	1,91			36
38	1,91	2,03	1,74	1,74	1,75			38
40	1,79	1,91	1,65	1,65				40
42	1,69	1,8	1,56	1,56				42
44	1,59	1,7	1,5	1,5				44
45	1,55	1,65						45

Wind max. 14m/s / 6,5 Bft

* Plus-Traglastkurven mit steuerungstechnischen Einschränkungen (reduzierte Geschwindigkeit)



Total 48t

	0°	0° PLUS*	15°	45 15° PLUS	30°	45°	45° PLUS	
3,3	8	8	1,85	2,6	6	1,85	2,8	3,3
10	7,82	8	1,85	2,6	5,75	1,85	2,8	10
12	6,37	6,83	1,85	2,6	4,92	1,85	2,8	12
14	5,35	5,7	1,85	2,6	4,29	1,85	2,8	14
16	4,61	4,88	1,85	2,6	3,79	1,85	2,8	16
18	4,03	4,25	1,85	2,6	3,39	1,85	2,8	18
20	3,57	3,76	1,85	2,6	3,06	1,85	2,8	20
22	3,2	3,36	1,85	2,6	2,78	1,85	2,8	22
24	2,9	3,03	1,85	2,52	2,55	1,85	2,67	24
26	2,64	2,76	1,85	2,32	2,34	1,85	2,43	26
28	2,42	2,52	1,85	2,14	2,17	1,85	2,23	28
30	2,23	2,32	1,85	1,99	2,01	1,85	2,05	30
32	2,06	2,15	1,85	1,85	1,88	1,85	1,9	32
34	1,92	1,99	1,73	1,73	1,75			34
36	1,79	1,86	1,62	1,62	1,64			36
38	1,67	1,74	1,52	1,52	1,55			38
40	1,57	1,63	1,43	1,43				40
42	1,48	1,53	1,35	1,35				42
44	1,39	1,44	1,3	1,3				44
45	1,35	1,4						45

Wind max. 14m/s / 6,5 Bft

* Plus-Traglastkurven mit steuerungstechnischen Einschränkungen (reduzierte Geschwindigkeit)



Total 44t

	0°	0° PLUS*	45 15°	30°	45°	
3,3	8	8	1,85	6	1,85	3,3
6	8	8	1,85	6	1,85	6
10	4,547	4,547	1,85	4,19	1,85	10
12	3,706	3,706	1,85	3,464	1,85	12
14	3,112	3,112	1,85	2,938	1,85	14
16	2,668	2,668	1,85	2,539	1,85	16
18	2,326	2,326	1,85	2,226	1,85	18
20	2,052	2,052	1,85	1,973	1,85	20
22	1,829	1,829	1,767	1,766	1,85	22
24	1,644	1,644	1,584	1,592	1,663	24
26	1,488	1,488	1,431	1,445	1,504	26
28	1,354	1,354	1,299	1,318	1,369	28
30	1,238	1,238	1,186	1,208	1,252	30
32	1,137	1,137	1,087	1,111	1,15	32
34	1,048	1,048	1	1,026		34
36	0,969	0,969	0,923	0,95		36
38	0,898	0,898	0,854	0,882		38
40	0,834	0,834	0,792			40
42	0,777	0,777	0,736			42
44	0,724	0,724				44
45	0,7	0,7				45

Wind max. 14m/s / 6,5 Bft

* Plus-Traglastkurven mit steuerungstechnischen Einschränkungen (reduzierte Geschwindigkeit)

Aufstellvorgang / Erection procedure

